Kansas Air Regulations



The 1970 Clean Air Act (CAA) set national ambient air quality standards (NAAQS) for six "criteria" pollutants sulfur dioxide (SO2), nitrous oxides (NOx), carbon monoxide (CO), particulate matter (PM), lead (Pb), and ozone (regulated as volatile organic compounds or VOC). The CAA was amended in 1977 to authorize EPA standards for "prevention of significant deterioration" (PSD) to maintain good air quality where it already existed. Further amendments to the CAA in 1990 added, among other things, a program to regulate a list of 187 hazardous air pollutants (HAPs) called maximum achievable control technology (MACT) standards and Title V permits (also known in Kansas as Class I permits). Because the need for permits is based on a facility's potential emissions of either criteria or hazardous air pollutants, or both, many small businesses were required to obtain some type of operating permit. Although EPA has the regulatory authority for air permitting, it can delegate the authority or approve a state implementation plan giving authority to individual states. EPA has approved Kansas' air permitting SIP and thus has transferred air permitting authority here to the state. Consequently, the state of Kansas has the authority to issue permits for facilities within its borders.

Air operating permits

Two main types of permits are issued under the Kansas Air Quality Act – construction permits and operating permits. Construction permits are applicable to **projects** (new emission units and/or modification of existing emission units) and operating permits are applicable to the **entire facility**. In other words, for construction permits/approvals, the facility would be required to evaluate the increase in potential to emit (PTE) and applicable requirements for the project only. For operating permits, the facility would be required to evaluate the PTE and applicable requirements for the entire facility. New or existing facilities that add new emission sources or modify existing emission sources of air pollutants (e.g., a new paint booth or a new natural gas oven), must evaluate these new or modified emission sources to determine whether they need a **construction permit** or **approval**. During preconstruction review, the Kansas Department of Health and Environment (KDHE), Bureau of Air (BOA) ensures that proposed construction projects at new and existing facilities can meet applicable Kansas and federal air quality requirements. A construction permit or approval is required <u>BEFORE</u> a facility can install and operate a new source or modify an existing source of air pollutants.

The second type of permit – a **Class I or II air operating permit** – is required for major sources of air pollutants. A major source is defined as a facility with the potential to annually emit –

- \cdot 10 tons or more of any HAP;
- 25 tons or more of any combination of HAPs; or
 100 tons or more of any other regulated air pollutant including SO2, NOx, CO, PM10, Pb, and VOC

Air regulations can be complex and confusing to many business owners, particularly small business owners who frequently do not have the same resources to devote to environmental compliance as larger businesses do. Consequently, the Kansas Small Business Environmental Assistance Program (SBEAP), in conjunction with KDHE BOA has developed this fact sheet to describe in **five steps** how to determine whether your facility requires an air construction approval or permit, or an air operating permit.

Step 1: List all air pollution-emitting equipment or operations (emission unit or source) in your facility.

As defined by Kansas Administrative Regulation (KAR) 28-19-200(x), an emission source is "[a]ny machine, equipment, device, or other article or operation that directly or indirectly releases contaminants into the outdoor atmosphere." So, an emission source can be a





Air Emissions

Examples of Emission Units			
Emission Units	Emissions from Activities		
Compressors	Loading operations	Valves and vents	
Generators	Solid wastes	Material storage/ transfer	
Paint booths	Wastewater collec- tion and treatment	Haul roads	
Burn-off ovens	Transfer opera- tions	Degreasing tanks	
Degassing (lines, pumps, vessels)	Conveyors	Welding	
Engines	Tank truck load- ing/unloading	Painting	

device, such as a paint booth or a natural gas space heater, or an activity such as loading/unloading or welding operations. An emission unit is "[a]ny part or activity of a stationary source that emits or would have the potential to emit any regulated pollutant or any pollutant listed under 42 U.S.C. §7412(b) of the federal Clean Air Act." Note: The terms emission source and emission unit are often used interchangeably.

Emission units do not have to be connected to a stack or vent. You can also combine emission units, or even view the entire facility as an emission unit. Say, for example, your facility has only three paint booths. A paint booth would be considered an emission unit because it has the potential to emit pollutants through coatings or solvents used in conjunction with painting operations. You can consider each of the paint booths as a separate emissions unit, combine the three paint booths into a single emissions unit, or view the entire facility as an emissions unit. The definition of an emission source is very broad and includes almost any industrial or process equipment.

Not all emissions units are required to be included in your emissions assessments. Several categories of activities are exempt. Check the list on pages 7-10 of the KDHE Class I Operating Permit Application Forms and Instructions. Please refer to the application for a full explanation of these exempt activities. Exempt activities (from Class I permit application instructions – <u>www.kdheks.gov/air-permit/download.html</u>) include the following:

Fuel use Upkeep and maintenance Production operations Finishing operations Storage tanks Wastewater collection/treatment

Cleaning operations Residential activities Recreational activities Health care facilities Miscellaneous

Step 2: Calculate air pollution emissions for your facility.

As indicated above, whether your facility needs a permit is based on your **potential** emissions, not your actual emissions. Your facility's PTE is based on the maximum design capacity of a stationary source to emit a pollutant under its physical and operational design. PTE calculations are based on 24-hour operation, 365 days per year, and operations at maximum capacity. PTE calculations also do not include pollution control devices or practices, unless there is an inherent bottleneck, a physical or operational limitation, that is part of the design of the facility or emission unit. Bottlenecks prevent operation of equipment at 100% capacity and can be considered when calculating PTE. Be sure, though, that the bottleneck isn't resolved in the future, thus changing your PTE.

Once you've identified your emission sources, you need to calculate the PTE for each pollutant associated with the source. Remember, pollutants you need to track are the criteria pollutants [SO2, NOx, CO, PM/PM10, lead, and VOCs (for ozone)] and the 187 HAPs.

For fuel combustion units (e.g., ovens and boilers), you calculate emissions for each fuel used. If the source can use different types of fuel, PTE calculations are based on the fuel that generates the highest potential emissions (worst-case scenario). For other equipment, you calculate emissions based on materials used.

Methods of calculation include the following, from the most preferred to the least preferred:

- CEMS
- Stack tests
- Material balance
- Emission factors
- Engineering judgment
- Other approved method



Air Emissions

Sample PTE calculation using material balance:

A facility operates a paint booth 2,000 hours a year and uses 3,000 gallons of blue paint with a density of 9.85 pounds per gallon. The paint contains 40% volatile organic compounds (VOCs) by weight.

Actual emissions

(3,000 gal/yr) x (9.85 lbs/gal) x (0.40 lbs VOC/lb of paint)

= (11,820 lbs of VOC/year) x (1 ton/2,000 lbs) = 5.9 tons of VOC/year

Potential emissions

(5.9 tons of VOC) x (8,760 potential hours/2,000 actual hours) = 25.8 potential tons VOC/year

The blue paint also contains xylene (a HAP) at 30% by weight, so you follow the same calculation for each HAP.

Actual emissions

(3,000 gal/yr) x (9.85 lbs/gal) x (0.3 lbs xylene/lb of paint)

= $(8,865 \text{ lbs of xylene/year}) \times (1 \text{ ton/}2,000 \text{ lbs})$ = 4.4 tons of xylene/year

Potential emissions

(4.4 tons of xylene) x (8,760 potential hours/2,000 actual hours)

= 19.3 potential tons xylene/year

Sample PTE calculation using emission factors

Consider a facility with a No. 6 oil-fired boiler, firing normally, with low NOx, that can burn a maximum of 76 gallons/hour. Weight percentage of sulfur in the oil is 5%. PTE for SO₂ and SO₃ would be calculated as shown.

The first step is going to the "Emissions Factor/AP42" link at the EPA website at <u>http://www.epa.gov/ttn/chief/ap42/index.html</u> and looking under Chapter 1 External Combustion Sources, Section 1.3 Fuel Oil Combustion. You would find that Table 1.3-1 contains emission factors for sulfur oxides (SO₂ and SO₃), NOx, CO and PM/PM₁₀.

The second step would be determining if the boiler has a capacity > 100 million Btu/hr or < 100 million BTU/hour, which is how the table is divided. Many times, a boiler's input capacity can be found on its nameplate.

Finding that No. 6 oil has 150,000 BTUs/gallon, and knowing you can burn a maximum of 76 gallons per hour,

the boiler's capacity is determined to be $(150,000 \text{ BTU/} \text{gallon}) \times (76 \text{ gallons/hour}) = 11,400,000 \text{ BTU/hour or} 11.4 \text{ million BTU/hr.}$

Looking in the table for boilers < 100 million BTU/hr, the emission factor for SO₂ is found to be 157S, where S is weight percentage of sulfur in the oil; the emission factor for SO₃ is 2S.

Now, calculate your PTE. <u>Emission factor for SO₂</u> = (157 x 5 lbs/1,000 gallons of oil) = 0.785 lbs/gallon PTE SO₂ = (0.785 lbs/gallon) x (76 gallons/hr) x (8,760 hours per year) PTE SO₂ = 523,000 pounds per year PTE SO₂ = 261 tons SO2 per year

<u>Emission factor for SO₃</u> = (2 x 5 lbs per 1,000 gallons of oil) = 0.01 lbs/gallon PTE SO₃ = (0.01 lbs/gallon) x (76 gallons/hr) x (8,760 hours per year) PTE SO₃ = 6,658 pounds per year PTE SO₃ = 3.3 tons SO3 per year

Your PTE for SOx is (261 tons) + (3.3 tons) = 264 tons/year.

You would continue using the emission factors for NOx, CO, and PM/PM_{10} to find your total emissions for this emission unit.

Although these calculations are not difficult, they can be tedious, particularly if you have a number of different sources that generate many different criteria pollutants and HAPs.

Consequently, SBEAP has devised a number of tools to simplify this calculation process for you. These can be found on the SBEAP website at <u>www.sbeap.org/</u><u>resources/air</u>. You can also contact representatives from the KDHE BOA or from SBEAP to assist in your PTE calculations.



Air Emissions

Step 3: Compare results of your calculations with regulatory thresholds for construction permits or air operating permits, and determine if the facility is required to obtain a construction approval or permit, or air operating permit based on the type of project.

Now that you have the PTE for each criteria pollutant and HAP generated at your facility, all you have to do is compare those numbers to emission thresholds for KDHE permits.


Table 1. Construction Approval Thresholds		
Pollutant	PTE threshold	
Lead or lead compounds	0.1 pounds per hour	
SO_2 or SO_3	2 pounds per hour	
PM10	2 pounds per hour	
PM	5 pounds per hour	
PM/PM10 (Ag-related)	5 pounds per hour	
NO _x	50 pounds per 24 hours	
СО	50 pounds per 24 hours	
(Areas Except Wyandotte/Johnson Counties)		
VOCs	50 pounds per 24 hours	
(Wyandotte/Johnson Counties)		
VOCs	3 pounds per hour	
	15 pounds per 24 hours	

Table 2. Construction Permit Thresholds Pollutant PTE threshold		
	<u>I I E un conola</u>	
Lead	0.6 tons per year	
PM10	15 tons per year	
PM	25 tons per year	
PM (Ag-related)	100 tons per year	
SO_2 or SO_3	40 tons per year	
VOC	40 tons per year	
NO _x	40 tons per year	
СО	100 tons per year	
HAPs (individual)	10 tons per year	
HAPs (any combination)	25 tons per year	

Table 3. Class I Air Operating Permit Threshold Pollutant PTE threshold	
SO ₂ or SO ₃	100 tons per year
VOC	100 tons per year
NO _x	100 tons per year
CO	100 tons per year
PM_{10}	100 tons per year
HAPs (individual)	10 tons per year
HAPs (any combination)	25 tons per year

Class II air operating permit threshold

As shown in the graph below, if your potential emissions (red) are above the major source threshold, but your actual emissions (blue) are below the major source threshold, you can apply for a Class II air operating permit, which is more streamlined and less costly than a Class I air operating permit. The Class II air operating permit will have federally enforceable permit conditions that will limit potential emissions to below Class I major source thresholds.

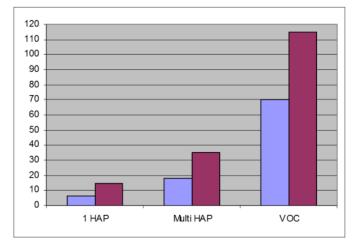

As shown in the PTE example above, the painting operations had a PTE for xylene of 19.3 tons/year, which exceeds the threshold for a Class I air operating permit, but has actual emissions of only 4.4 tons/year of xylene. Therefore, this facility could apply for a Class II air operating permit and accept federally enforceable permit conditions to maintain its emissions below the Class I threshold.

Some projects are required to obtain a construction approval or permit in accordance with K.A.R. 28-19-300, even if potential emissions from the project are less than the construction approval/permit thresholds. These projects include the following: (1) the emission unit is an affected source for the acid rain program; (2) the emission unit is a major source of HAPs; (3) the emission unit is an incinerator; (4) the emission unit is subject to a New Source Performance Standard (K.A.R. 28-19-720, which generally adopts 40 CFR Part 60 by reference); (5) the emission unit is subject to a National Emission Standard for Hazardous Air Pollutants (K.A.R. 28-19-735, which generally adopts 40 CFR Part 61 by reference); or (6) the emission unit is subject to a maximum achievable control technology for hazardous air pollutants (K.A.R. 28-19-750, which generally adopts 40 CFR Part 63 by reference).

July 2011

Some facilities are required to obtain a Class I operating permit even if potential emissions from the facility do not exceed the major source threshold. These facilities include but are not limited to landfills subject to New Source Performance Standard (40 CFR Part 60) Subpart WWW and hospital/medical/infectious waste incinerators subject to New Source Performance Standard Subpart Ec.

Step 4: Apply for the appropriate approval or permit if you exceed the thresholds, or are otherwise required to obtain an approval or permit.

After you've used your PTE calculations to determine whether your facility requires a construction permit or approval, or a Class I or II air operating permit, simply go to the KDHE website at <u>http://www.kdheks.gov/airpermit/download.html</u>, and download the appropriate forms. Each permit form has its own set of instructions, which simplifies the application process.

In addition to a general operating permit application for crushed and broken stone facilities, KDHE developed several streamlined Class II air operating permit applications for specific facility types. These "permits by rule" include the following:

- Sources with actual emissions less than 50% of the major source threshold
- Hot-mix asphalt facilities
- Organic solvent evaporative sources
- Reciprocating engines

Note: Your Class I permit will include all federally enforceable requirements for your facility, and your construction approval or permit will include all federally enforceable requirements for your project at the time of permit issuance. Be sure to review your permit frequently and note all compliance dates for reporting and performance tests.

For construction permits, you will need to submit the Notification of Construction or Modification form and all appropriate process/equipment description forms that apply to your facility.

This publication was created by Kansas State University's Pollution Prevention Institute through the Small Business Environmental Assistance Program (SBEAP). SBEAP's mission is to help Kansas small businesses comply with environmental regulations and identify pollution prevention opportunities. SBEAP is funded through a contract with the Kansas Department of Health and Environment. SBEAP services are free and confidential. For more information, call 800-578-8898, send an e-mail to *sbeap@ksu.edu*, or visit our Web site at *www.sbeap.org*. Kansas State University is an EEO/AA provider. KDHE also has expedited construction approval applications for boilers, and compression- and spark-ignition emergency generators.

Step 5: If the equipment or entire facility is exempt because potential emissions do not exceed the thresholds and the facility is not otherwise required to obtain an approval or permit, maintain records of your initial assessment, continue to track emissions, and be prepared to provide these records to inspectors.

Also, please note that if your facility does not require either a Class I or II air operating permit, it still may fall under various air quality area source rules, which have specific notification and compliance requirements. A list of these area source rules can be found on the EPA website at <u>http://www.epa.gov/ttn/atw/area/compilation.html</u>. SBEAP also has information and tools to assist small businesses with several area source rules, including gasoline-dispensing facilities, paint-stripping and miscellaneous surface-coating operations, metal fabrication and finishing, and stationary reciprocating internal combustion engines. Visit our website at <u>http://www.sbeap.org/</u> <u>aqrules</u>.



Notice of nondiscrimination

Kansas State University is committed to nondiscrimination on the basis of race, color, ethnic or national origin, sex, sexual orientation, gender identity, religion, age, ancestry, disability, military status, veteran status, or other non-merit reasons, in admissions, educational programs or activities and employment, including employment of disabled veterans and veterans of the Vietnam Era, as required by applicable laws and regulations. Responsibility for coordination of compliance efforts and receipt of inquiries concerning Title VI of the Civil Rights Act of 1964, Title IX of the Education Amendments of 1972, Section 504 of the Rehabilitation Act of 1973, the Age Discrimination Act of 1975, and the Americans With Disabilities Act of 1990, has been delegated to the Director of Affirmative Action, Kansas State University, 214 Anderson Hall, Manhattan, KS 66506-0124, (Phone) 785-532-6220; (TTY) 785-532-4807.